




## Goodwe WIFI reconnection via App

### **Preparation**

1. Power inverter on;
2. If you are configuring inverter, make sure the yellow LED on front cover is blinking;
3. Power Wi-Fi router on;
4. Search for the keyword "SEMS Portal" from Google Play Store or Apple App Store, download and install the latest version of the monitoring software for free.
5. As app keeps updating always, please update to the latest version

# Configure Wireless Network

1. Click "Wi-Fi Configuration" in login page

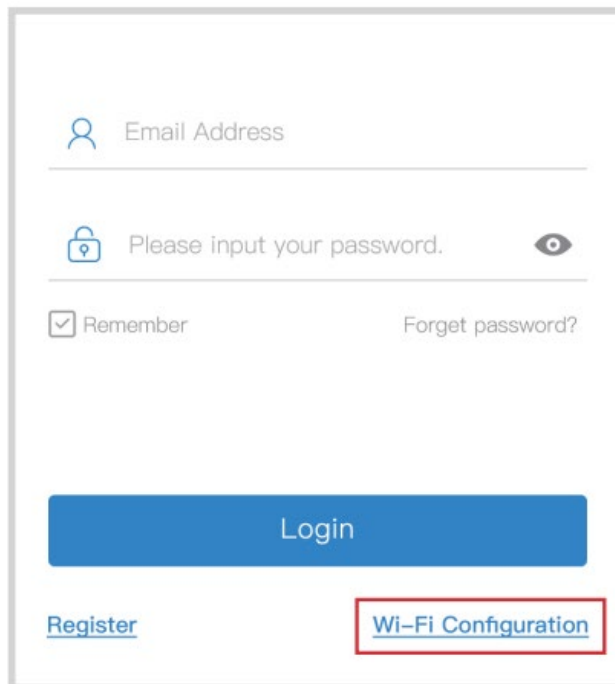


The image shows a login page with the following elements:

- An "Email Address" input field with a person icon.
- A password input field with the placeholder text "Please input your password." and an eye icon for toggling visibility.
- A checkbox labeled "Remember" and a link labeled "Forget password?".
- A large blue "Login" button.
- Two links at the bottom: "Register" and "Wi-Fi Configuration". The "Wi-Fi Configuration" link is highlighted with a red rectangular border.

2. Or click the third one in tab bar



3. Power on inverter, then click "Next"

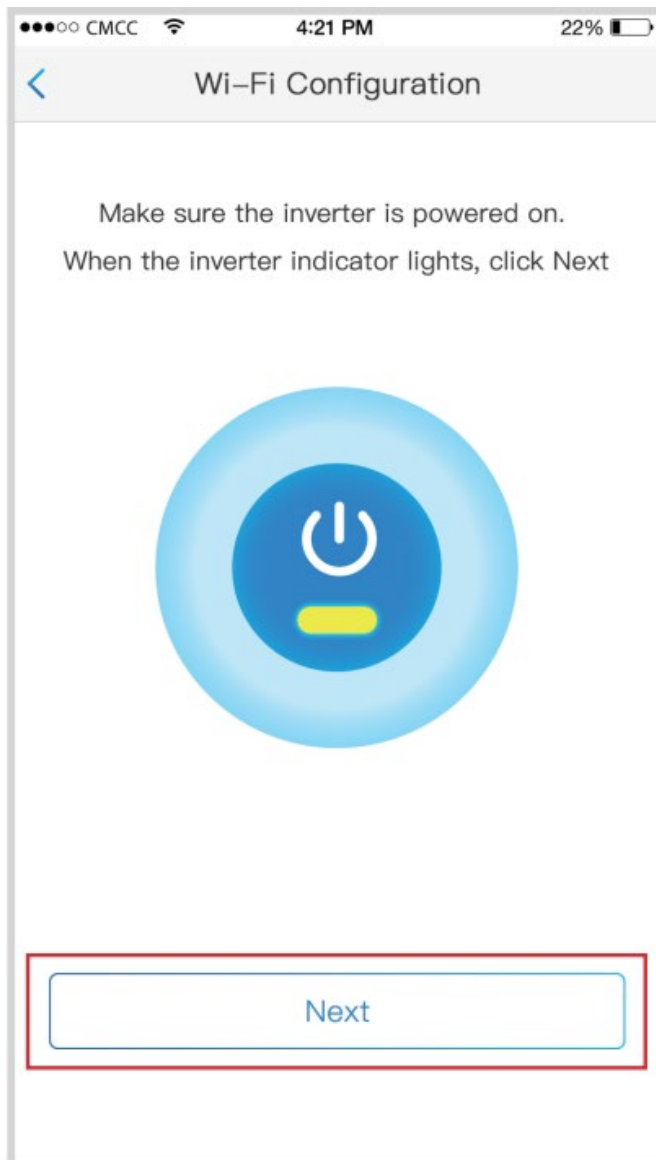


4. Click "Go into WLAN setting interface"




5. Connect to Solar-WiFi (password:12345678) back to App



6. Click "Next"

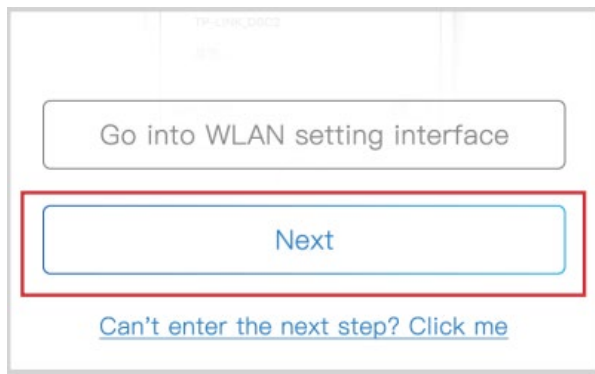

## 7. Select your WiFi network

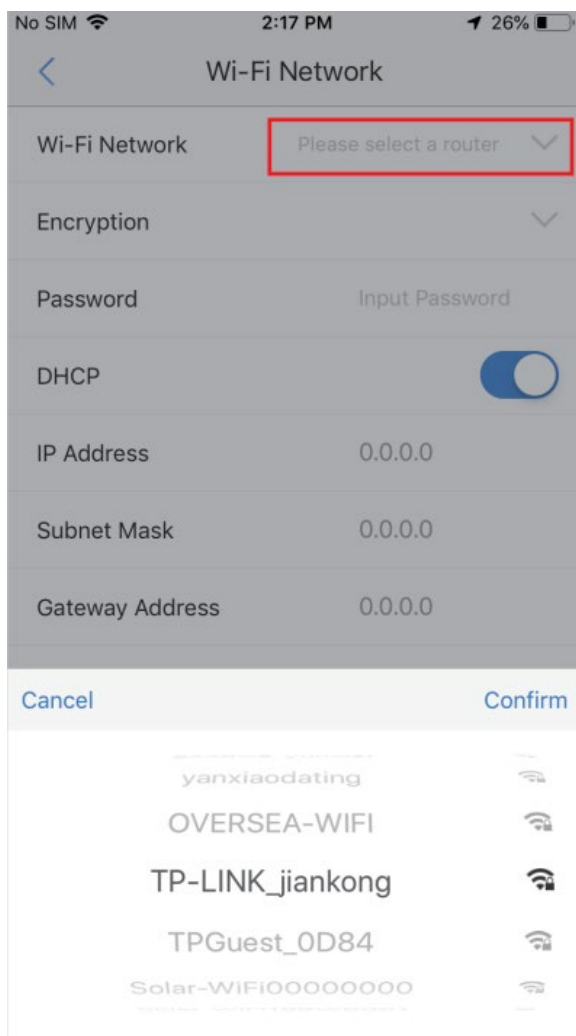

## 8. Enter password, and click "Set"


No SIM 2:17 PM 26%

### Wi-Fi Network


|                 |                                     |   |
|-----------------|-------------------------------------|---|
| Wi-Fi Network   | TP-LINK_jiankong                    | ▼ |
| Encryption      | WPA2PSK/AES                         | ▼ |
| Password        | <div>Input Password</div>           |   |
| DHCP            | <input checked="" type="checkbox"/> |   |
| IP Address      | 0.0.0.0                             |   |
| Subnet Mask     | 0.0.0.0                             |   |
| Gateway Address | 0.0.0.0                             |   |
| DNS Server      | 0.0.0.0                             |   |

Set

9. Click "OK"

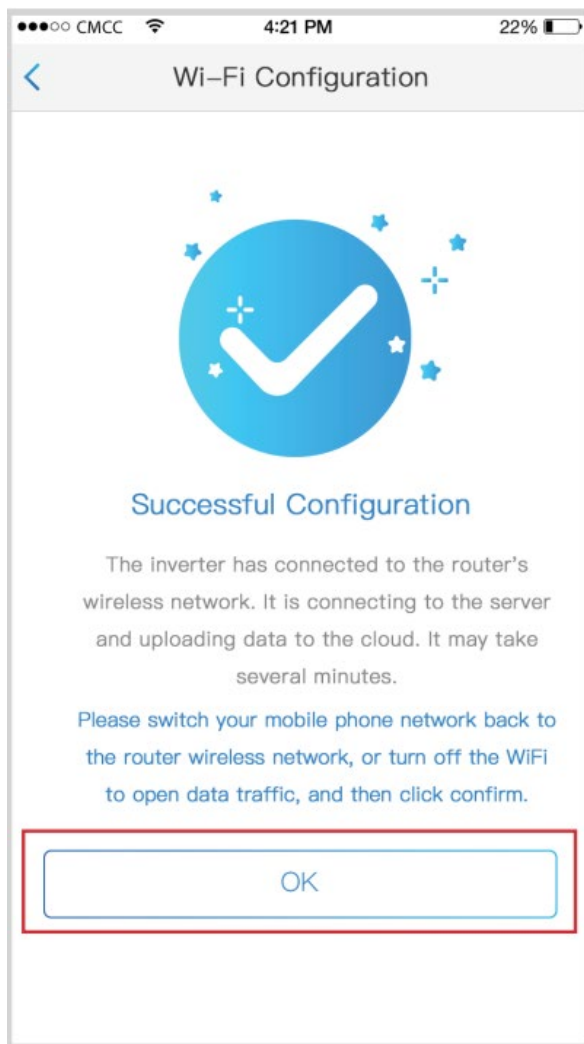

**10.** If it fails, you can "Reconfigure" or view "Configuration help"

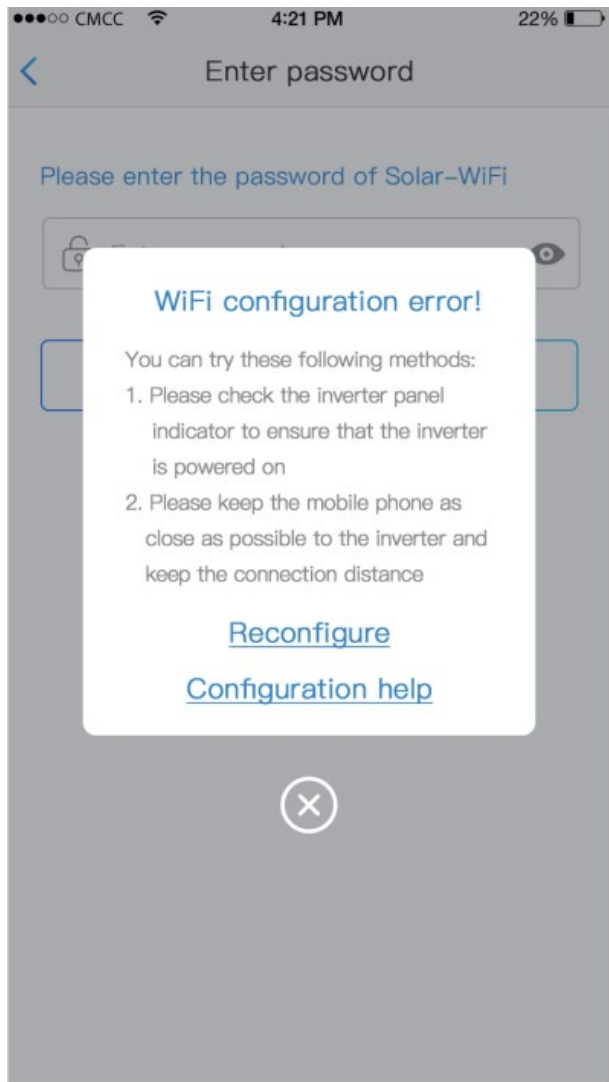

**11.** Follow up the instructions and try again.

